

OPK

CP

HAND PALLET TRUCK



— Japan Quality —



FOUNDED 1934



OKUDAYA GIKEN CO., LTD.

OSAKA JAPAN

ESTABLISHED 1954

Hand Pallet Truck further evolved

The comprehensive technology of OKUDAYA GIKEN as a leading manufacturer has developed complete new models taking over the excellent performance of the long sellers.

✓ Incorporates a resin-made handle.

The material has been changed from iron to smooth lightweight resin with improvement in functionality. The strength of the handle is preeminent for a resin-made component.

✓ A completely new handle design.

Based on a universal design concept, the handle has been changed in shape completely. OPK's new handle was designed in pursuit of a form that is easy-to-use for everyone, which allows flexible handling with delicate angle adjustments.

✓ Steering wheel with aluminium core.

The core has been changed from cast metal to aluminium. The weight reduction of the steering wheel ensures smooth handling.


✓ OPK's unique operation method.

The lever can be set to the neutral position with ease by pulling up the lever in the front direction. No delicate adjustments are required. OPK's Hand Pallet Truck has been adopting this unique method over many years in consideration of the operability and safety of the lever, thus gaining high evaluation and trust of all Catch Pallet Truck users.

✓ A variety of options to meet on-site needs.

Making the best use of OPK's longtime experience and know-how, OKUDAYA GIKEN has prepared a variety of options to meet all on-site environments and operating conditions. OPK's product variations in a wide variety in combination with these options respond to a wide range of customer needs.

(For details, see page 6.)

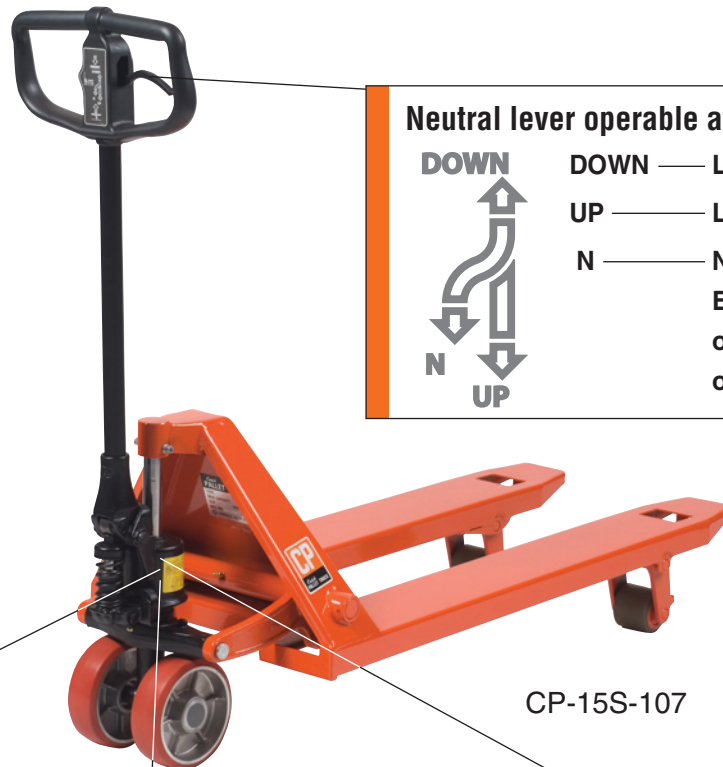

Neutral lever operable at ease



DOWN — Lowering

UP — Lifting

N — Neutral

Ensures ease of operation with or without loads.

Incorporates automatic load check valve

Prevents pallet overloading at the time of lifting, thus protecting the operator and product.

Incorporates valve cleaning device

Simply cleans the inner side of the valve, thus keeping the valve in normal condition.

Safety lowering valve

A built-in swoop prevention valve safely moves loads downward.

Standard Type

Standard Models, Standard Types

A unique design with no maintenance effort required promises epoch-making cargo transfer. Select the best suitable model from wide variations.



CP-15S-107



CP-50L-150

For heavy loads (5 tons)




CP-15L-140
CP-20L-140

For double-sided pallets (1,100 mm)


Specifications for Standard Types

Specification Model	Capacity (kg)	Min. H (mm)		Max. H (mm)		Fork (mm)				Overall length (mm)	Overall height (mm)	Steering wheel Dia. φ width (mm)	Load wheel Dia. φ width (mm)	Net weight (kg)
		H ₁	H ₂	Outer width	Length			Inner width						
				W ₁	L ₁	L ₂	L ₃	W ₂	L ₄	H ₃				
CP-15M-85	1,500	80	200	470	850	730	570	170	1,260	1,170	Rubber 180×60	Urethane 80×73	62	
CP-15S-85					980	860	700	220	1,390				72	
CP-15S-98				1,070	950	790	220	1,480	73					
CP-15S-107				1,150	1,030	870	220	1,560	74					
CP-15S-115				620	1,070	950	790	320	1,480				75	
CP-15J-107				850	730	570	385	1,260	76					
CP-15L-85				1,070	950	790	385	1,480	80					
CP-15L-107				1,220	1,100	940	385	1,630	83					
CP-15L-122				1,400	1,280	1,120	385	1,810	93					
CP-15L-140				850	730	570	220	1,260	72					
CP-20S-85	2,000	80	200	520	1,070	950	790	220	1,480	1,170	Rubber 180×60	Urethane 80×73	74	
CP-20S-107					1,150	1,030	870	220	1,560				75	
CP-20S-115				850	730	570	385	1,260	76					
CP-20L-85				1,070	950	790	385	1,480	80					
CP-20L-107				1,220	1,100	940	385	1,630	83					
CP-20L-122				1,400	1,280	1,120	385	1,810	93					
CP-20L-140				520	1,070	950	790	220	1,480				74	
CP-25S-107				1,150	1,030	870	220	1,560	75					
CP-25L-122				685	1,070	950	790	385	1,480				80	
CP-30S-107				1,220	1,100	940	385	1,630	83					
CP-30L-122	1,400	1,280	1,120	385	1,810	93								
CP-30L-160	520	1,070	1,010	770	180	1,480	100							
CP-50L-150	3,000	85	205	685	1,220	1,160	920	345	1,630	1,170	Urethane 180×60	Urethane 80×73	115	
CP-50L-180	1,600	1,540	1,300	360	2,010	135								
	1,500	1,440	1,200	360	1,900	220								
	1,800	1,760	1,500	360	2,200	240								

Dimensions

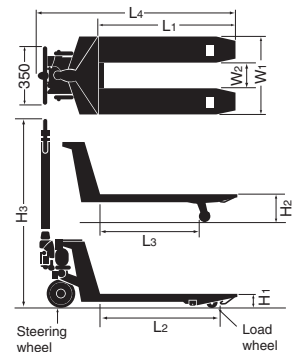

(Option) Tandem-wheel model
(Standard model only)



Option



Parking Brake
Mountable to all models.

© is available on request.