

Standard Type

Standard Models, Standard Types


A unique design with no maintenance effort required promises epoch-making cargo transfer. Select the best suitable model from wide variations.




Specifications for Standard Types

Model	Specification	Capacity (kg)	Min. H (mm)	Max. H (mm)	Fork (mm)					Overall length (mm)	Overall height (mm)	Steering wheel Dia. φ width (mm)	Load wheel Dia. φ width (mm)	Net weight (kg)					
					Outer width	Length			Inner width										
		H ₁	H ₂	W ₁	L ₁	L ₂	L ₃	W ₂	L ₄	H ₃									
◎	CP- 7M - 85	700	65	185	450	850	770	625	210	1,240	1,150	Rubber 150×45	Urethane 65×56	51					
	520				1,000									920	775	280	1,390	53	
	650					1,200	1,120	975	410	1,590								55	
	CP- 7 L - 100																58		
	CP- 7 L - 120																64		
◎	CP-10M - 85	1,000	80	200	450	850	775	625	210	1,240	1,150	Rubber 180×60	Urethane 80×56	51					
	520				1,000									925	775	280	1,390	53	
	650					1,200	1,125	975	410	1,590								55	
	CP-10S - 100																58		
	CP-10 L - 120																64		
◎	CP-13S - 100	1,300	80	200	520	1,000	925	775	280	1,390	1,150	Rubber 180×60	Urethane 80×56	57					
	650				410									60					
	CP-15M - 85	1,500	80	200	470	850	730	570	170	1,260	1,170	Rubber 180×60	Urethane 80×73	62					
	CP-15S - 85				520									1,070	950	790	220	1,480	72
	CP-15S - 98					980	860	700	1,390	73									
	CP-15S - 107					1,070	950	790	1,480	74									
	CP-15S - 115					1,150	1,030	870	1,560	75									
	CP-15J - 98				620	980	860	700	320	1,390				1,480	74				
	CP-15J - 107														1,070	950	790	1,480	75
	CP-15L - 85				685	850	730	570	385	1,260				1,480	76				
	CP-15L - 107														1,070	950	790	1,480	80
	CP-15L - 122														1,220	1,100	940	1,630	83
	CP-15L - 140	1,400	1,280	1,120							1,810	93							
	CP-20S - 85	2,000	80	200	520	850	730	570	220	1,260	1,170	Rubber 180×60	Urethane 80×73	72					
	CP-20S - 107					1,070	950	790		1,480				74					
	CP-20S - 115					1,150	1,030	870		1,560				75					
	CP-20L - 85				685	850	730	570	385	1,260				76					
	CP-20L - 107					1,070	950	790		1,480				80					
	CP-20L - 122					1,220	1,100	940		1,630				83					
	CP-20L - 140					1,400	1,280	1,120		1,810				93					
CP-25S - 107	2,500	80	200	520	1,070	950	790	220	1,480	1,170	Urethane 180×60	Urethane 80×73	82						
CP-25L - 122				685	1,220	1,100	940		385				1,630	88					
CP-30S - 107	3,000	85	205	520	1,070	1,010	770	180	1,480	1,170	Urethane 180×60	Urethane Tandem 80×73	100						
CP-30L - 122				685	1,220	1,160	920		345				1,630	115					
CP-30L - 160					1,600	1,540	1,300						2,010	135					
◎	CP-35S - 107	3,500	85	205	520	1,070	1,010	770	180	1,450	1,170	Urethane 180×60	Urethane 80×73	102					
◎	CP-35L - 122				685	1,220	1,160	920		345				1,600	117				
◎	CP-35L - 160					1,600	1,540	1,300						1,980	137				
◎	CP-50L - 150	5,000	100	220	700	1,500	1,440	1,200	360	1,900	1,190	Urethane 200×70	Urethane Tandem 80×73	220					
	CP-50L - 180					1,800	1,760	1,500		2,200				240					


© is available on request. ※The handles of CP-35 and CP-50 are made of steel.



■ Dimensions

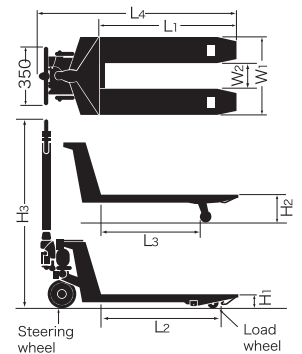

(Option) Tandem-wheel model (Standard model only)



■ Option



Parking Brake

Mountable to all models.